


Model: JY92-IIDN ve JY92-IIDN

Ultrasonic homogenizer details Features:

1. LCD big display new type
2. Centralized controlled by microprocessor
3. Step less regulation of the ultrasonic power
4. Set the ultrasonic time and pause time, temperature accord to requirement
5. Real-time temperature, frequency monitoring
6. 10 programmer can be saved
7. Noise reduction 35db
8. Have Sound chamber
9. Have temperature sensor
10. Power 220-240V 50 or 60Hz
11. Programmable timer 999 minutes and adjustable pulse on/off 1 second to 10 seconds



Model	JY92-IIDN	JY92-IIDN
Frequency	20-25Khz	20-25Khz
Display	7 inch TFT touch screen	7 inch TFT touch screen
Power range	650W(1%-99%)	900W(1%-99%)
Accompany Tip	6mm	6mm
Optional Tip	2.3.10.12.15mm	2.3.10.12.15mm
Processing volume	0.5-500ml	0.5-600ml
Duty Ratio	1-99%	0.1-99.9%
Temperature Probe	no	YES
Alarm	Overtime overload	Overtime Temperature overload
Ultrasonic host size	430*255*300mm	430*255*300mm
Soundproof box size	345*340*570mm	430*255*300mm
Weight	14kg	14kg
Power supply	220/110v 50hz/60hz	220/110v 50hz/60hz

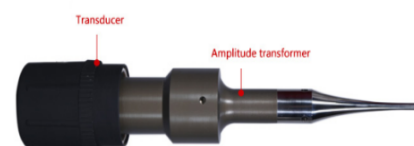

Tip Model	Frequency(KHZ)	Power Range	Crushing Capacity
Φ2	1/12"	20-25KHz	20-250W
Φ3	1/8"	20-25KHz	30-400W
Φ6	1/4"	20-25KHz	60-650W
Φ10	5/12"	20-25KHz/19.5-20.5KHz	100-950W
Φ12	1/2"	20-25KHz	100-950W
Φ15	5/8"	20-25KHz/19.5-20.5KHz	200-950W
Φ18	3/4"	20-25KHz	200-950W
Φ20	3/4"	19.5-20.5KHz	400-1200W
Φ25	1"	19.5-20.5KHz	800-1800W

